



SERIE AM-10

REVERSIBLE SINGLE-PHASE AUTOTRANSFORMERS

125/220VAC

Dry type transformer.

Norms: According to EN 61558-2-13.

Reversible Voltages 125/220 VAC.

Windings: Class H (180°).

Insulation: Class B (130°).

Intermittent use.

Winding without galvanic isolation.

Frequency: 50-60 Hz.

Degree of protection: IP-20.

Made with protective metal covers painted with epoxy resin.

Class I.

Not resistant to short-circuits.



Core protected against corrosion.

Models from 300 VA to 1.000 VA with metal handle.

Models from 1.500 VA to 5.000 VA are manufactured with screw connection terminals.

***Under demand, they can be manufactured in other powers and different voltages of primary and secondary.**

***All specifications listed in this brochure are subject to change without notice.**

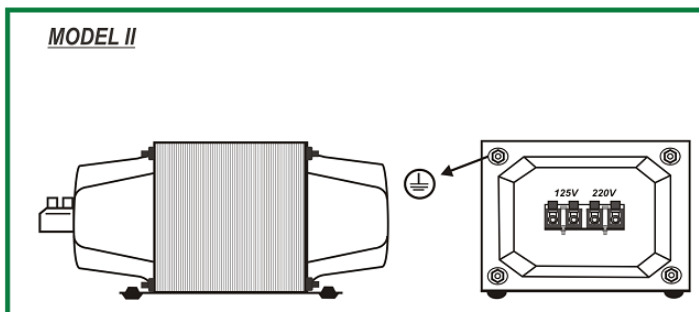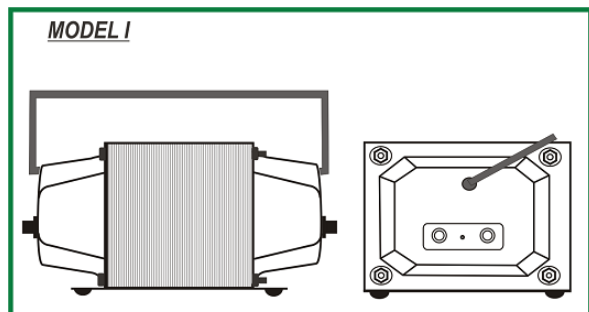

POTENCIA POWER	CODIGO CODE	TENSIONES VOLTAGES	CORRIENTES CURRENTS (A)		MODELO MODEL	EMBALAJE PACKING
			125V	220V		
100 VA	AM-10001	125/220 V AC	0,8A	0,4A	I	10
300 VA	AM-10003	125/220 V AC	2,4A	1,3A	I	8
500 VA	AM-10005	125/220 V AC	4A	2,2A	I	8
750 VA	AM-10006	125/220 V AC	6A	3,4A	I	8
1000 VA	AM-10007	125/220 V AC	8A	4,5A	I	6
1500 VA	AM-10008	125/220 V AC	12A	6,8A	II	4
2000 VA	AM-10009	125/220 V AC	16A	9,1A	II	2
2500 VA	AM-10010	125/220 V AC	20A	11,3A	II	2
3000 VA	AM-10011	125/220 V AC	24A	13,6A	II	2
4000 VA	AM-10012	125/220 V AC	32A	18,1A	II	1
5000 VA	AM-10013	125/220 V AC	40A	22,7A	II	1

Bajo demanda se fabrican en diferentes tensiones y potencias (Máximo cuatro voltajes)

Other voltages arrangements available according to costumers requirements (maximum four voltages).

The **REVERSIBLE SINGLE-PHASE AUTOTRANSFORMERS PHONOVox** are apparatus which have been designed chiefly for solving the problems which arise on connecting electrical apparatus for industrial and domestic use to networks of different voltage.

Raise or reduce the mains voltage in order to provide the necessary voltage to the equipments.



PHONOVox

Polígono de Cogullada – C/. Benjamín Franklin, 8 – 50014 – Zaragoza

Email: info@phonovoxsa.com

Tel.: (+34) 976 470 911

*Todas las especificaciones indicadas en este documento podrán modificarse sin previo aviso

*All specifications listed in this brochure are subject to change without notice.

يمكن للتغيير جميع الخصائص الموصوفة دون إشعار مسبق