



SERIE AM-20 REVERSIBLE SINGLE-PHASE AUTOTRANSFORMERS ENCAPSULATED

Dry type transformer.
Norms: According to EN 61558-2-13.
Reversible Voltages AC.
Windings: Class H (180°).
Insulation: Class B (130°).
Winding without galvanic isolation.
Frequency: 50-60 Hz.

Degree of protection: IP-42.

Made with protective metal box painted with epoxy resin.

Steel box protected against rust and corrosion.

Encapsulated in Polyurethane resin.



Class I.

Not resistant to short-circuits.

Several options to put compression glands IP-68.

***Under demand, they can be manufactured in other powers and different voltages of primary and secondary.**

***All specifications listed in this brochure are subject to change without notice.**

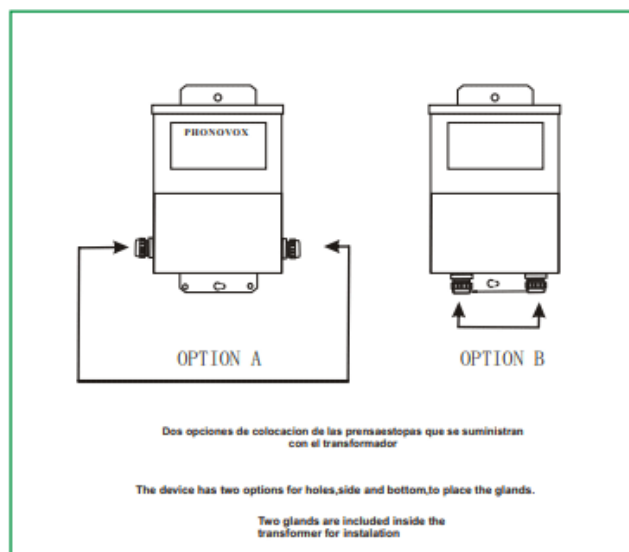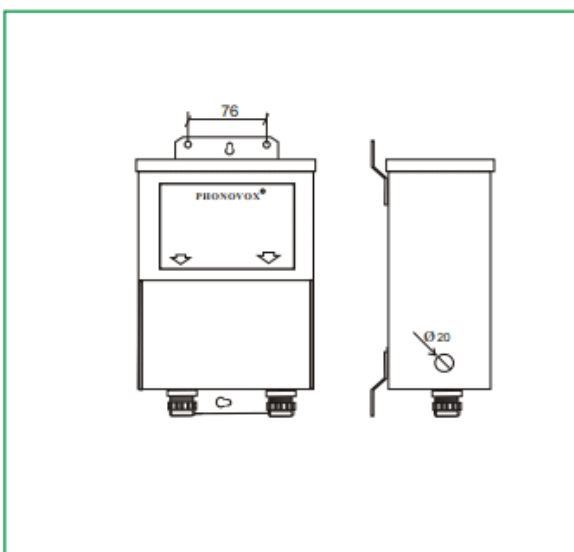

Se pueden fabricar en diferentes potencias y distintos voltajes de primario y secundario

Different voltages (primary and secondary) and other power available upon request.

PHONOVOX

Polígono de Cogullada
C/. Benjamín Franklin, 8
50014 Zaragoza

Email: info@phonovoxsa.com

Tel.: (+34) 976 470 911

Fax: (+34) 976 473 301

***Todas las especificaciones indicadas en este documento podrán modificarse sin previo aviso**

*All specifications listed in this brochure are subject to change without notice.

يمكن للتغيير جميع الخصائص الموصوفة دون إشعار مسبق