



**SERIE TS-29**  
**SAFETY TRANSFORMERS**  
**230/24 VAC**

Safety Transformers

Transformer with circuit separation

Manufactured according to the standard EN-61558-2-6:2009

Primary Voltages: 230 V AC

Secondary Voltages: 24 V AC

Frequency: 50/60 Hz.

Degree of protection: IP-00

Class I

Insulation Class F (155°C)


Windings Class H (180°C)

Transformer for indoor built-in-use only

Connection terminal for grounding

**\*Different powers and other voltages in primary and secondary available under request**

**\*All specifications listed in this brochure are subject to change without notice**

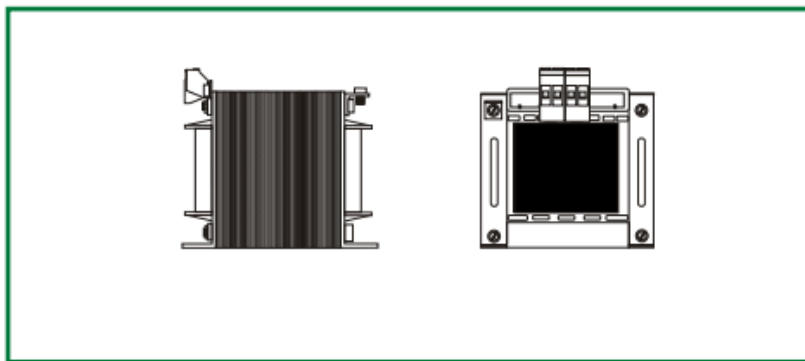

CODIGO CODE	POTENCIA POWER	CORRIENTES PRI. CURRENTS PRI. (A) 230V	CORRIENTES SEC. CURRENTS SEC. (A) 24 V
TS-29001	63 VA	0,27 A	2,63 A
TS-29002	100 VA	0,43 A	4,17 A
TS-29003	160 VA	0,70 A	6,67 A
TS-29004	200 VA	0,87 A	8,33 A
TS-29005	250 VA	1,09 A	10,42 A
TS-29006	315 VA	1,37 A	13,13 A
TS-29007	400 VA	1,74 A	16,67 A
TS-29008	500 VA	2,17 A	20,83 A
TS-29009	630 VA	2,74 A	26,25 A
TS-29010	1.000 VA	4,35 A	41,67 A

Bajo demanda se fabrican en diferentes tensiones y potencias (Máximo cuatro voltajes)

Other voltages arrangements available according to costumers requirements (maximum four voltages).

They are designed to feed control and maneuvering applications in Very Low Voltage Safety Circuits (up to 50 Vac). They are circuit separation transformers with secondary voltage not higher than 50 v. with double or reinforced insulation between the primary and secondary windings.

They can also be manufactured with galvanic isolation in installations for safety reasons



# PHONOVOX

Polígono de Cogullada – C/. Benjamín Franklin, 8 – 50014 – Zaragoza

Email: [info@phonovoxsa.com](mailto:info@phonovoxsa.com)

Tel.: (+34) 976 470 911

\*Todas las especificaciones indicadas en este documento podrán modificarse sin previo aviso  
 \*All specifications listed in this brochure are subject to change without notice.

يمكن للتغيير جميع الخصائص الموصوفة دون إشعار مسبق