



**SERIE TS-29**  
**SAFETY TRANSFORMERS**  
**230/24 VAC**

Safety Transformers

Transformer with circuit separation

Manufactured according to the standard EN-61558-2-6:2009

Primary Voltages: 230 V AC

Secondary Voltages: 24 V AC

Frequency: 50/60 Hz.

Degree of protection: IP-00


Class I

Insulation Class F (155°C)

Windings Class H (180°C)  
Transformer for indoor built-in-use only  
Connection terminal for grounding

**\*Different powers and other voltages in primary and secondary available under request**

**\*All specifications listed in this brochure are subject to change without notice**

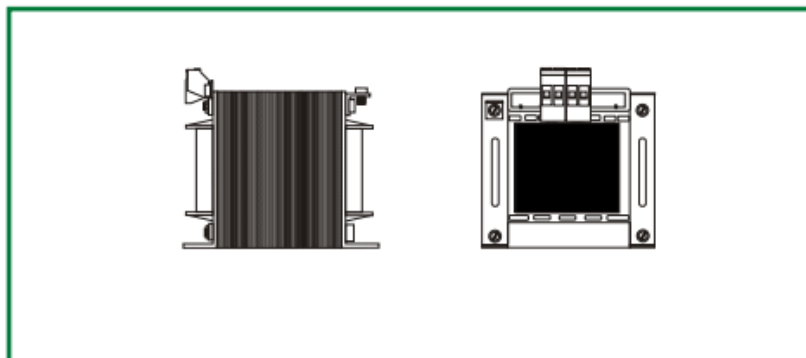

<b>CODIGO</b> CODE	<b>POTENCIA</b> POWER	<b>CORRIENTES PRI.</b> CURRENTS PRI. (A) <b>230V</b>	<b>CORRIENTES SEC.</b> CURRENTS SEC. (A) <b>24 V</b>
TS-29001	63 VA	0,27 A	2,63 A
TS-29002	100 VA	0,43 A	4,17 A
TS-29003	160 VA	0,70 A	6,67 A
TS-29004	200 VA	0,87 A	8,33 A
TS-29005	250 VA	1,09 A	10,42 A
TS-29006	315 VA	1,37 A	13,13 A
TS-29007	400 VA	1,74 A	16,67 A
TS-29008	500 VA	2,17 A	20,83 A
TS-29009	630 VA	2,74 A	26,25 A
TS-29010	1.000 VA	4,35 A	41,67 A

Bajo demanda se fabrican en diferentes tensiones y potencias (Máximo cuatro voltajes)

Other voltages arrangements available according to costumers requirements (maximum four voltages).

# PHONOVOX

Polígono de Cogullada  
C/. Benjamín Franklin, 8  
50014 Zaragoza

Email: [info@phonovoxsa.com](mailto:info@phonovoxsa.com)

Tel.: (+34) 976 470 911

Fax: (+34) 976 473 301

\*Todas las especificaciones indicadas en este documento podrán modificarse sin previo aviso

\*All specifications listed in this brochure are subject to change without notice.

يمكن للتغيير جميع الخصائص الموصوفة دون إشعار مسبق